

Schlage Omnia **Quick Start Guide**

The Schlage Omnia lock is a Bluetooth capable smart lock that can be unlocked with a key, card, code, fingerprint, or fob. In order to set up your lock, you will need the following:

- An Android or iPhone smart phone
- A card or fob to begin the programming process

How to set up your Schlage Omnia Smart Lock

1. Download Schlage Breeze and create an account
2. Follow the instructions in Schlage Breeze to pair your lock to your mobile, a card/tag will be needed to wake the lock
3. Within Schlage Breeze choose "Grant Access" then "Add Credential" and follow the instructions to grant your card or fob access to your Schlage Omnia



Schlage Breeze app
Google Play



Schlage Breeze app
Apple

If you are unable to pair your lock to Schlage Breeze, please contact Allegion on 0800 477 869.

Unlocking your Schlage Omnia Smart Lock


1. Present the card/tag to the external card reader
2. Rotate the lever downward and open the door



Note: the internal lever is always unlocked as a fire safety feature to ensure occupants can always exit at any time.

Battery replacement:

1. Remove screw at bottom of external side of lock
2. Remove battery cover
3. Replace 4 AAA batteries with alkaline batteries (batteries should last up to 12 months)

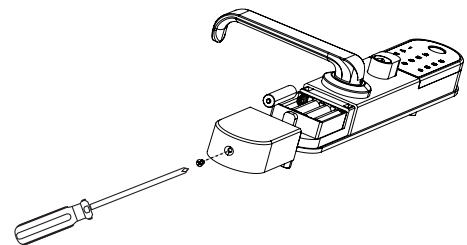


For more information on the Schlage Omnia Smart Lock, or Schlage Breeze app, please contact our Customer Service team on 0800 477 869.

How to reset your **Schlage Omnia Smart Lock**

Please follow these instructions if you are having trouble pairing your Schlage Omnia Smart Lock to your Schlage Breeze app on your mobile phone.


1.

Remove the Schlage Omnia from your door by removing the two screws located on the interior body.

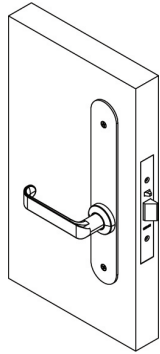

2.

Ensure the batteries are installed and the lock has power.

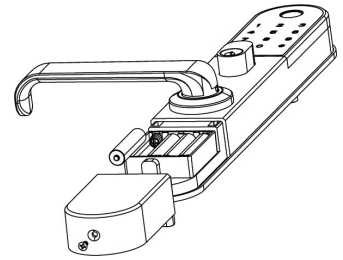


3.

Hold down the reset button located on the inside of the exterior body, for 5 seconds until you hear "Input initialisation code."

Note: A long, pointed object will be required to reach the small button.

Note: If you hear "Please enter administrator code." then you have not held down the button for long enough, please try again.

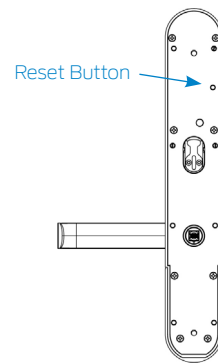


4.

Enter 000000#
(six zeros then hash).




5.

You will hear "Deleting administrator successful."



6.

Your Schlage Omnia Smart Lock has now been reset back to factory settings and can be paired to the Schlage Breeze app.

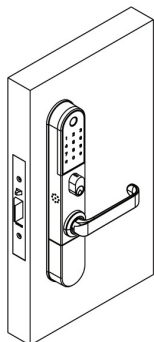

7.

Open the Schlage Breeze mobile app and follow the instructions to pair your Schlage Omnia Smart Lock.

